

# FQSS 213-Q

Diode Pumped Passively Q-Switched Solid State Laser

- **213 nm**
- **Pulsed ( $\leq 1.0$  ns)**
- **Up to 2.5  $\mu$ J**
- **Up to 20 kHz**
- **External and Internal Trigger**
- **Free Beam**
- **Single Pulse Operation**



## biology · biomedicine · chemistry · analytics


| Optical Data                     |  | FQSS213-Q1                            | FQSS213-Q2            | FQSS213-Q3            | FQSS213-Q4_1k         |  |  |  |  |
|----------------------------------|--|---------------------------------------|-----------------------|-----------------------|-----------------------|--|--|--|--|
| Wavelength                       |  | 213 nm                                |                       |                       |                       |  |  |  |  |
| Pulse Energy                     |  | > 0.05 $\mu$ J @15kHz                 | > 0.1 $\mu$ J @10kHz  | > 1.5 $\mu$ J @1kHz   | > 2.5 $\mu$ J @1kHz   |  |  |  |  |
| Peak Power                       |  | > 0.05 kW @15kHz                      | > 0.1 kW @10kHz       | > 1.5 kW @1kHz        | > 2.5 kW @1kHz        |  |  |  |  |
| Pulse Repetition Rate            |  | $\leq$ 20 kHz                         | $\leq$ 10 kHz         | $\leq$ 2.5 kHz        | $\leq$ 1 kHz          |  |  |  |  |
| Pulse Width, FWHM                |  | $\leq$ 1.0 ns                         |                       |                       |                       |  |  |  |  |
| Polarization Ratio               |  | > 100:1 horizontal                    |                       |                       |                       |  |  |  |  |
| Pulse Energy Drift <sup>1)</sup> |  | < $\pm$ 5 %                           | < $\pm$ 5 %           | < $\pm$ 5 %           | < $\pm$ 5 %           |  |  |  |  |
| Pulse-To-Pulse RMS <sup>2)</sup> |  | < 4% @15kHz                           | < 2% @10kHz           | < 2% @1kHz            | < 2% @1kHz            |  |  |  |  |
| Laser Classification             |  | 4 / IV                                | 4 / IV                | 4 / IV                | 4 / IV                |  |  |  |  |
| Optical Output                   | Spatial Mode   | TEM <sub>00</sub> (Ellipticity > 0.3) |                       |                       |                       |  |  |  |  |
|                                  | Beam Divergence, 2 $\Theta$  | < 2.0 mrad                            | < 2.0 mrad            | < 2.5 mrad            | < 3.0 mrad            |  |  |  |  |
|                                  | Beam Diameter  | 400 $\pm$ 200 $\mu$ m                 | 400 $\pm$ 200 $\mu$ m | 450 $\pm$ 200 $\mu$ m | 450 $\pm$ 200 $\mu$ m |  |  |  |  |
| Electrical Data                  | Power Consumption  | 15 W (max.40 W)                       | 17 W (max.40 W)       | 20 W (max.70 W)       | 22 W (max.80 W)       |  |  |  |  |
|                                  | Operating Voltage  | 12 V DC                               |                       |                       |                       |  |  |  |  |
|                                  | Line Voltage   | 90 - 240 V AC (50 – 60 Hz)            |                       |                       |                       |  |  |  |  |
|                                  | Marking  |                                       |                       |                       |                       |  |  |  |  |
| Interfaces                       | RS 232, USB  |                                       |                       |                       |                       |  |  |  |  |
|                                  | External Trigger (TTL, rising edge) single shot (pulse on demand) – max. repetition rate |                                       |                       |                       |                       |  |  |  |  |
|                                  | Interface for TTL-control and power monitor  |                                       |                       |                       |                       |  |  |  |  |
| Miscellaneous                    | Warm-up Time   | < 5 min                               |                       |                       |                       |  |  |  |  |
|                                  | Operating Temperature  | 18 - 38 °C                            |                       |                       |                       |  |  |  |  |
| Options                          | Stand-alone system (incl. key-switch, heat-sink and manual shutter; CDRH compliant)      |                                       |                       |                       |                       |  |  |  |  |
|                                  | Synchronization signal output (rise time < 2 ns)   |                                       |                       |                       |                       |  |  |  |  |
|                                  | Manual shutter or electrical beam blocker  |                                       |                       |                       |                       |  |  |  |  |
|                                  | External beam expander (e.g. 3x) on request  |                                       |                       |                       |                       |  |  |  |  |

<sup>1)</sup> Drift over 6 hours, energy averaged over 10 sec after 5 min of continuous operation, temperature variation  $\pm$  3 °C and < 3 °C/hour.


<sup>2)</sup> RMS over 1000 pulses after 5 min of continuous operation.

## Dimensions


Laser Head: 220 x 54 x 39 mm

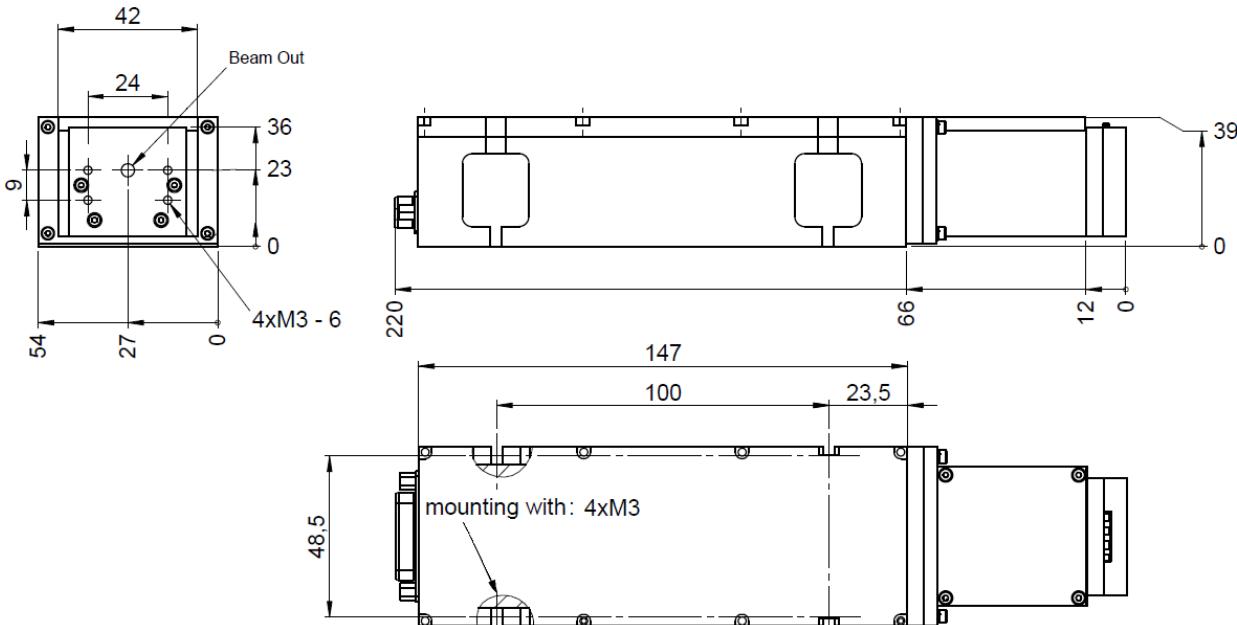

Controller Stand-Alone: Q1, Q2: 135 x 115 x 64 mm; Q3, Q4: 175 x 115 x 64 mm



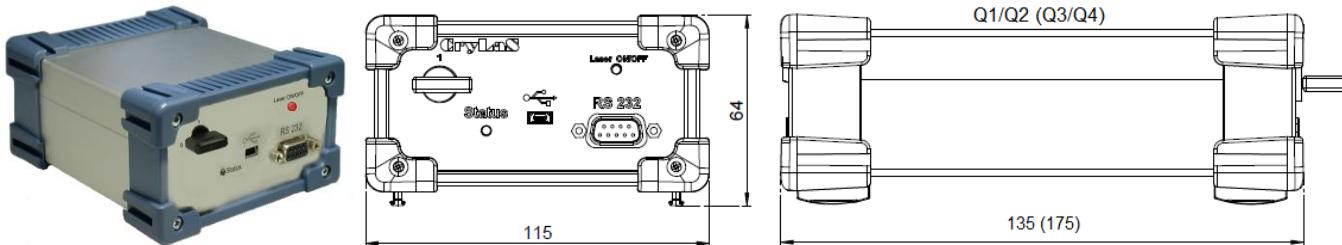


Controller OEM: Q1, Q2: 133 x 130 x 35/50 mm; Q3, Q4: 173 x 130 x 35/50 mm

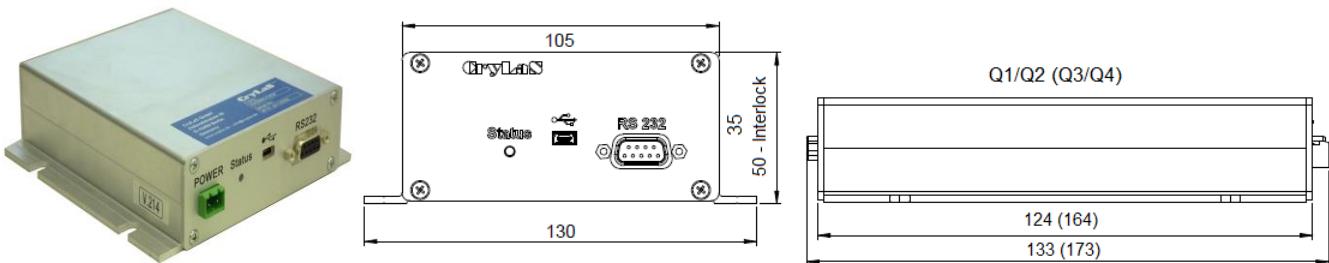

## Laser Safety Label

The FQSS 213-Q lasers are class 4 / IV according to IEC 60825-1:2014

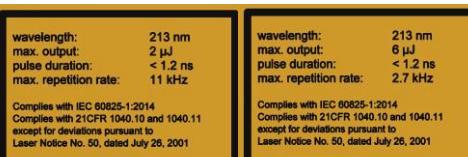

Q1 series

Q2 series

Q3 series

Q4 serie

